

**iQ300, built-under cooker hood,  
60 cm, Stainless steel  
LU16150GB**



LZ27000      Active carbon filter

The built-under-cooker hood is installed beneath the upper cabinet or on the wall to save space.

✓ The 350 m3/h extraction rate supplies clean air when cooking.

Typology: ..... Built-in/Built-under  
 Length electrical supply cord: ..... 130 cm  
 Net weight: ..... 10.0 kg  
 Type of control: ..... mechanical  
 Number of speed settings: ..... 3  
 Max. recirculation: ..... 260 m³/h  
 Number of lights: ..... 2  
 Noise level: ..... 68 dB(A) re 1pW  
 Diameter of air outlet: ..... 120 mm  
 Grease filter material: ..... Washable aluminium  
 Odour filter: ..... Yes  
 Air circulation: ..... Convertible  
 Optional accessories: ..... LZ27000  
 Type of lamps used: ..... Halogen  
 Total power of the lamps: ..... 56 W  
 Grease filter type: ..... Kasette  
 Clean filter reminders: ..... No  
 Connection rating: ..... 306 W  
 Voltage: ..... 230-240 V  
 Frequency: ..... 50 Hz  
 Plug type: ..... GB plug  
 Installation typology: ..... Built-under  
 Material of the body: ..... Stainless steel  
 Plug type: ..... GB plug  
 Dimensions of the product, with chimney (if exists) (in): ..... x x  
 Dimensions of the packed product: ..... 8.26 x 25.19 x 21.65  
 Net weight: ..... 22.000 lbs  
 Gross weight: ..... 24.000 lbs  
 Motor location: ..... Integrated motor in hood body  
 No-return airflow flap: ..... No  
 Length electrical supply cord: ..... 130 cm  
 Dimensions of the product, with chimney (if exists): . 210x600x482 mm  
 Dimensions of the packed product (HxWxD): .....210x640x550 mm  
 Net weight: ..... 10.0 kg  
 Gross weight: ..... 11.0 kg



## iQ300, built-under cooker hood, 60 cm, Stainless steel LU16150GB

### Variant:

#### Design:

- 600 mm width

#### Comfort:

- Suitable for ducted or re-circulated extraction
- Push button controls for 3 speeds
- Twin motor
- Adjustable glass visor
- 2 x halogen - energy saving lamps
- Metal grease filter, dishwasher safe

#### Technical information:


- Ducted extraction rate according to DIN/EN 61591: max. 350 m<sup>3</sup>/h
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 68 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- Power rating: 306 W

#### Measures:


- Dimensions exhaust air (HxWxD): 150 - 150 x 600 x 482 mm
- Dimensions recirculating (HxWxD): 150 - 150 x 600 x 482 mm
- 120 mm diameter pipe
- Light Intensity: 110 lux
- Colour Temperature: 2700 K

#### Environment and Safety:

**iQ300, built-under cooker hood,  
60 cm, Stainless steel  
LU16150GB**

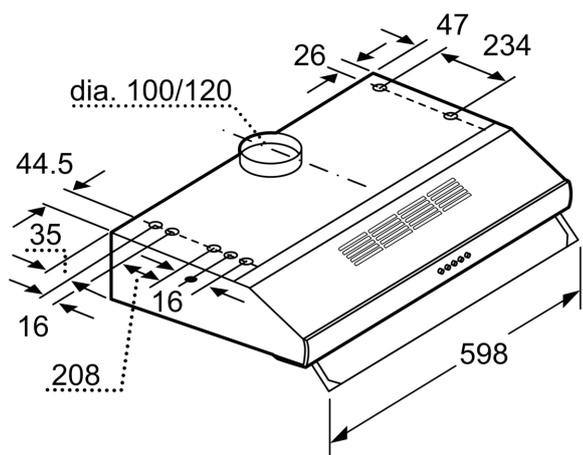

measurements in mm

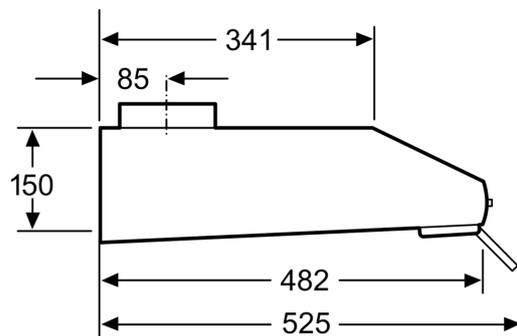

measurements in mm